

Main Features:

One touch cleansing; Wand nozzle self-clean; Seat temperature adjustment; Auto deodorization; Night light; Remote control; Sensor open/close; Auto flush;

Dimensions: 678*443*525

Water Efficiency: Grade 3 ($\leq 5.3L$)

Flush Type: Jet siphon

Pit Distance:

305mm:

SW1291C/SW1292C/SW1293C/SW1294C/SW1295C/SW1296C

400mm:

SW1291D/SW1292D/SW1293D/SW1294D/SW1295D/SW1296D

Working Water Pressure: 0.14MPa-0.75MPa

Input: 110VAC 60HZ

Rated Power: 1200W

Anti-electric shock: TYPE I


Waterproof Grade: IPX4

Safety Devices: Butterfly thermostat; thermal fuse; flow sensor; Thermal fuse; bimetal thermal control device; air isolation

Standard:

GB/T 34549-2017 《Sanitary ware-Smart ware》

GB25502-2017 《Minimum allowable values of water efficiency and water efficiency grades for water closets》

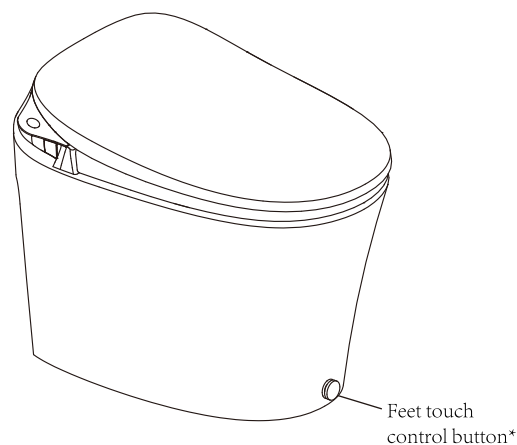

**Walden Series
Smart Toilet**

Models:

SW1291C; SW1291D no feet control

SW1292C; SW1292D no feet control


SW1293C; SW1293D no feet control

SW1294C; SW1294D

SW1295C; SW1295D

SW1296C; SW1296D

Unit: mm

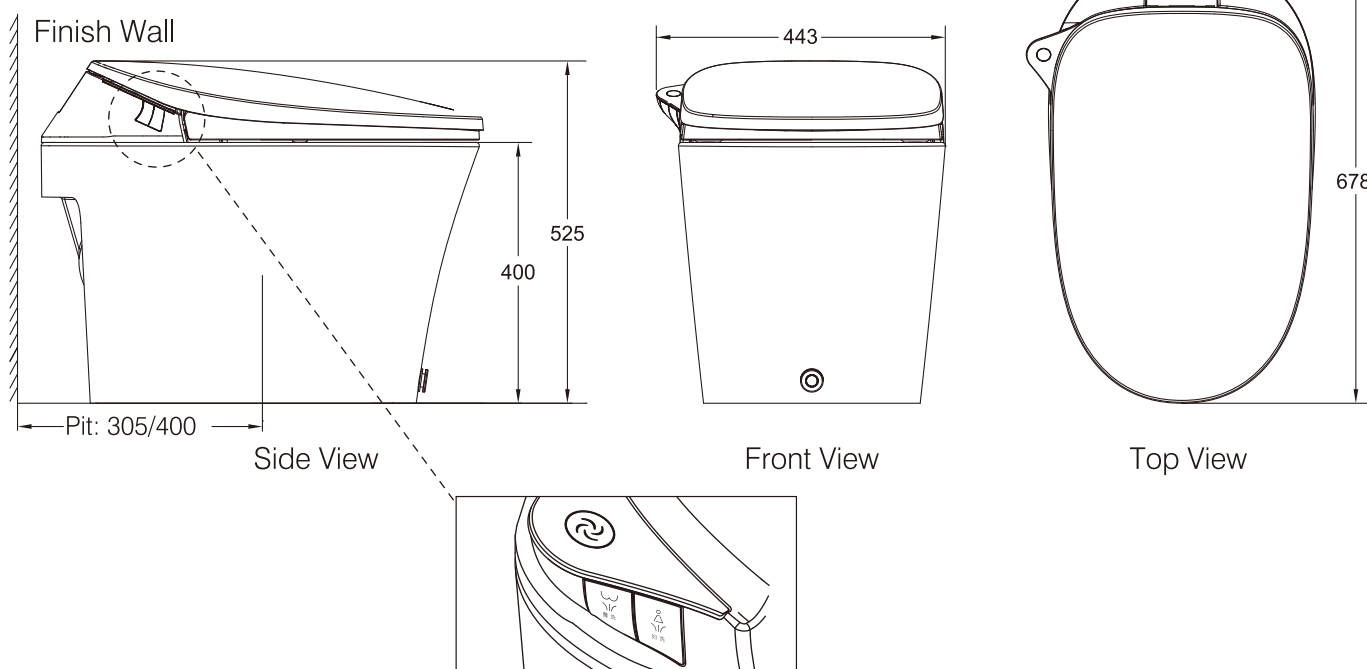

*MOEN reserves the right to change marked dimensions without prior notice.

CRITICAL DIMENSION

(DO NOT SCALE)

| | | |
|---------------------------|------------------------------|---|
| Rated voltage | | 110V |
| Rated frequency | | 60Hz |
| Rated power consumption | | 1200W(inlet water temp.15℃, outlet water temp. 40℃, dynamic is 700ml/min) |
| Maximum power consumption | | 1500W(inlet water temp.5℃, outlet water temp. 39℃, dynamic is 630ml/min) |
| Maximum power consumption | | 4℃~40℃ |
| Water supply temperature | | 4℃~35℃ |
| Water supply Connector | | DN15(G1/2") |
| Water supply pressure | Minimum Pressure | 0.14MPa and 18L/min Min. |
| | Maximum Pressure | 0.75MPa (dynamic pressure) |
| Toilet | Flush type | Jet siphon |
| | Pit Distance | 305mm/400mm |
| Cleansing | Heating type | Instant heating |
| | Rear cleansing spray volume | Approx.0.5~0.7L/min (4 levels) @0.2MPa |
| | Front cleansing spray volume | Approx.0.5~0.7L/min (4 levels) @0.2MPa |
| | water temperature | Off/approx. 30℃~40℃ (4 levels) |
| | Safety device | Butterfly thermostat, thermal fuse, flow sensor |
| Warm air dryer | Air temperature | Off/approx.35℃~55℃ (4 levels) |
| | Air flow volume | Approx.4m/s |
| | Safety device | Thermal fuse, bimetal thermal control device |
| Seate | Seat temperature | Off/Approx. 28℃~40℃ (4 levels) |
| | Safety device | Temperature fuse |
| Remote control | Dimension | L122mm×W122mm×H13.5mm |
| | Charge input | DC5V 500mA(self-prepare) |
| Waterproof grade | | IPX4 |
| Length of power cord | | Approx.1.5m |
| Product dimension | | L678mm×W443mm×h525mm |

Different model with different function

| Group | Model Functions | SW1296C/D Space Gray | SW1295C/D Space Gray | SW1294C/D Gold | SW1293C/D Space Gray | SW1292C/D Gold | SW1291C/D Silver |
|-------------------|----------------------------|-------------------------|-------------------------|-------------------|-------------------------|-------------------|---------------------|
| Remote | Remote control | ● | ● | ● | ● | ● | ● |
| Cleansing | Limitless cleansing | ● | ● | ● | ● | ● | ● |
| | Rear cleansing | ● | ● | ● | ● | ● | ● |
| | Front cleansing | ● | ● | ● | ● | ● | ● |
| | Air-in cleansing | ● | ● | ● | ● | ● | ● |
| | Auto cleansing | ● | ● | ● | ● | ● | ● |
| | Oscillating | ● | ● | ● | ● | ● | ● |
| | Warm/Cold cleansing | ● | ● | ● | ● | ● | ● |
| | Water pressure adjustable | ● | ● | ● | ● | ● | ● |
| | Water Temp.adjustable | ● | ● | ● | ● | ● | ● |
| | Nozzle position adjustable | ● | ● | ● | ● | ● | ● |
| | Nozzle self-clean | ● | ● | ● | ● | ● | ● |
| | Nozzle cleansing | ● | ● | ● | ● | ● | ● |
| Comfortable | Heated seat | ● | ● | ● | ● | ● | ● |
| | Warm air drying | ● | ● | ● | ● | ● | ● |
| | Laxative | ● | ● | ● | ● | ● | ● |
| | Slow-close Seat | ● | ● | ● | ● | ● | ● |
| | seat temp.adjustable | ● | ● | ● | ● | ● | ● |
| | Air temp.adjustable | ● | ● | ● | ● | ● | ● |
| Convenience | Night light | ● | ● | ● | ● | ● | ● |
| | Instant heat | ● | ● | ● | ● | ● | ● |
| | Energy saver | ● | ● | ● | ● | ● | ● |
| | Black-out flush | ● | ● | ● | ● | ● | ● |
| | Remote control | ● | ● | ● | ● | ● | ● |
| | Auto flush | ● | ● | ● | ● | ● | ● |
| | Flush during air drying | ● | ● | ● | ● | ● | ● |
| | One touch Button | ● | ● | ● | ● | ● | ● |
| | Body sensor open/close | ● | — | — | — | — | — |
| | Feet touch open cover | ● | ● | ● | — | — | — |
| | Feet touch open seat | ● | ● | ● | — | — | — |
| | feet touch flush | ● | ● | ● | — | — | — |
| | Seat detector | ● | ● | ● | ● | ● | ● |
| | Auto wet Ceramic ring | ● | ● | ● | ● | ● | ● |
| Safety and Eco | Water purifying | ● | ● | ● | ● | ● | ● |
| | Deodorizer | ● | ● | ● | ● | ● | ● |
| | Nozzle UV sterilization | ● | ● | ● | ● | ● | ● |
| | Air isolation | ● | ● | ● | ● | ● | ● |
| | Anit-backflow | ● | ● | ● | ● | ● | ● |
| | Travel mode | ● | ● | ● | ● | ● | ● |
| | Self-clean glaze | ● | ● | ● | ● | ● | ● |
| | Side button control | ● | ● | ● | ● | ● | ● |
| | Octuple Safty | ● | ● | ● | ● | ● | ● |
| | Antimicrobial seat | ● | ● | ● | ● | ● | ● |

Note: ● With this function; — Without this function;